



FORESTRY TYRES / WHEELS

DEL CORA®

FG



HBI

TYRES & WHEELS

MAXIMUM FOREST GRIP FOR FORESTRY EQUIPMENT










DELCORA®



- Optimal pulling power
- Self-cleaning capabilities
- Maximum traction and grip
- Puncture resistant pattern and sidewall
- Good terrain mobility (on- and offroad)
- Steel belted



SPECIFICATIONS

 Tyre size	 Pattern	PR	Type TT / TL	LS	 Overall diameter (mm)	 Section width (mm)	 Rim	 Tread depth (mm)	IP (BAR)	 Max. load capacity 40km/h
600/50-22.5	FG (ST)	20	TL	159A8/167A2	1151	601	AG 20.00	42	5	4375
650/45-22.5	FG (ST)	24	TL	175A8/161A2	1151	650	AG 20.00	42	5	3750
710/40-22.5	FG (ST)	20	TL	161A8/168A2	1151	700	AG 24.00	42	5	4625
600/55-26.5	FG (ST)	20	TT	165A8/172A2	1333	601	AG 20.00	42	5	5150
710/45-26.5	FG (ST)	20	TT	168A8/175A2	1333	700	AG 24.00	42	5	5600
800/40-26.5	FG (ST)	20	TT	170A8/177A2	1333	811	AG 28.00	42	5	6000


(ST) = Steel Belted

*Specs are specially for Forestry use

CUSTOM MADE RIMS, WE PRODUCE THEM TAILOR MADE

Design your own RIMS!

- The best solution for your business
- We provide optimal coating
- Available in any RAL colour
- Fast delivery
- Large stock

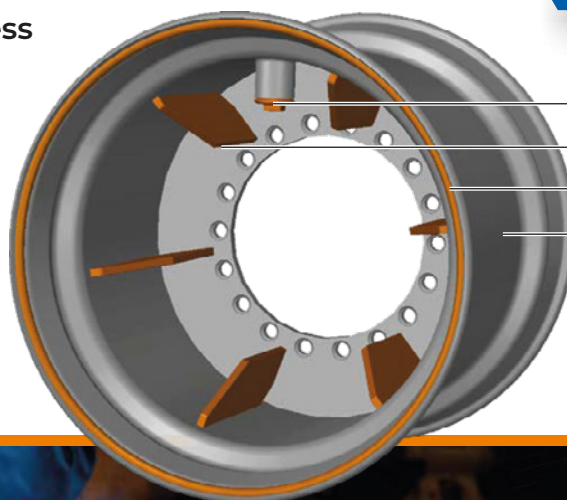

- FORESTRY VALVE GUARD
- REINFORCEMENT RIB
- REINFORCEMENT RING
- HIGH QUALITY STEEL RIM



Scan and see our welding robot in action!

www.hbi-tyres.com

A product of
HBI
TYRES & WHEELS

Head office

Hollandse Bandenmarkt Internationaal BV

Stevinweg 25 · 4691 SM Tholen · The Netherlands
T +31 (0)166 60 10 40 · F +31 (0)166 60 10 41 · info@hbi-tyres.com