

CAMSO ADT 753R



ARTICULATED
DUMP TRUCKS



RADIAL PERFORMANCE MEETS HIGH TRACTION

A premium and versatile solution for tough articulated dump truck applications. Combining excellent traction, stability and durability, it's an excellent solution for a wide variety of surface conditions.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO ADT 753R



NON-DIRECTIONAL TREAD PATTERN WITH OPTIMIZED LUG-TO-VOID RATIO

- Increases traction and durability in off-road conditions

DEEP TREAD DEPTH

- Enhances traction in off-road conditions



HEAVY-DUTY DUAL-STAR CARCASS


- Optimizes stability for articulated dump truck applications

PREMIUM RUBBER COMPOUNDS

- Reduces heat build-up

| TIRE SIZE | TYPE | RIM SIZE | TIRE DIMENSIONS | | | MACHINE | Tread Code | SI | LI | SPEED | | INFLATION PRESSURE [bar] [PSI] AND LOAD CAPACITY [kg] [lb] | | | | | | | |
|-----------|------|-----------|----------------------|----------------------|--------------------------|--------------|------------|-------|-------|-------|-------|--|-------|------|-------|-------|-------|-------|-------|
| | | | O.D. [mm] [in] | O.W. [mm] [in] | O.T.D. [mm] [32nd] | | | | | km/h | mph | bar | 3.00 | 4.00 | 4.50 | 5.00 | 5.50 | 6.00 | 6.50 |
| | | | | | | | | | | | | | PSI | 43 | 57 | 64 | 71 | 79 | 86 |
| 20.5R25 | TBLS | 17.00/2.0 | 1485 | 524 | 31 | Loader-Dozer | L-3 | A2 | 193 | 10 | 5 | kg | - | 8000 | 8750 | 9500 | 10000 | 10900 | 11500 |
| | | | | | | lb | - | 17600 | 19300 | 20900 | 22000 | 24000 | 25400 | | | | | | |
| | | | 58.5 | 20.6 | 39 | Earthmover | E-3 | B | 177 | 50 | 30 | kg | - | 5800 | 6500 | 6900 | - | - | - |
| | | | | | | lb | - | 12800 | 14300 | 15200 | - | - | - | | | | | | |
| | | | Grader | G-3 | A8 | 161 | 40 | 25 | kg | 4625 | - | - | - | - | - | - | | | |
| | | | | lb | 10200 | - | - | - | - | - | - | | | | | | | | |
| 23.5R25 | TBLS | 19.50/2.5 | 1615 | 614 | 34 | Loader-Dozer | L-3 | A2 | 201 | 10 | 5 | kg | - | - | 11200 | 12150 | 12850 | 13600 | 14500 |
| | | | | | | lb | - | - | 24700 | 26800 | 28300 | 30000 | 32000 | | | | | | |
| | | | 63.6 | 24.2 | 43 | Earthmover | E-3 | B | 185 | 50 | 30 | kg | - | - | 8250 | 9000 | - | - | - |
| | | | | | | lb | - | - | 18200 | 19800 | - | - | - | | | | | | |
| | | | Grader | G-3 | A8 | 161 | 40 | 25 | kg | 4625 | - | - | - | - | - | - | | | |
| | | | | lb | 10200 | - | - | - | - | - | - | | | | | | | | |
| 26.5R25 | TBLS | 22.00/3.0 | 1736 | 688 | 37 | Loader-Dozer | L-3 | A2 | 209 | 10 | 5 | kg | - | - | - | 15000 | 16000 | 17000 | 18500 |
| | | | | | | lb | - | - | - | 33100 | 35300 | 37500 | 40800 | | | | | | |
| | | | 68.3 | 27.01 | 47 | Earthmover | E-3 | B | 193 | 50 | 30 | kg | - | - | - | 11200 | - | - | - |
| | | | | | | lb | - | - | - | 24700 | - | - | - | | | | | | |
| | | | Grader | G-3 | A8 | 161 | 40 | 25 | kg | 4625 | - | - | - | - | - | - | | | |
| | | | | lb | 10200 | - | - | - | - | - | - | | | | | | | | |
| 29.5R25 | TBLS | 25.00/3.5 | 1871 | 777 | 38 | Loader-Dozer | L-3 | A2 | 216 | 10 | 5 | kg | - | - | - | 18000 | 19500 | 20600 | 22400 |
| | | | | | | lb | - | - | - | 39700 | 43000 | 45400 | 49400 | | | | | | |
| | | | 73.7 | 30.6 | 48 | Earthmover | E-3 | B | 200 | 50 | 30 | kg | - | - | - | 13600 | - | - | - |
| | | | | | | lb | - | - | - | 30000 | - | - | - | | | | | | |
| | | | Grader | G-3 | A8 | 161 | 40 | 25 | kg | 4625 | - | - | - | - | - | - | | | |
| | | | | lb | 10200 | - | - | - | - | - | - | | | | | | | | |

LUG-TO-VOID RATIO

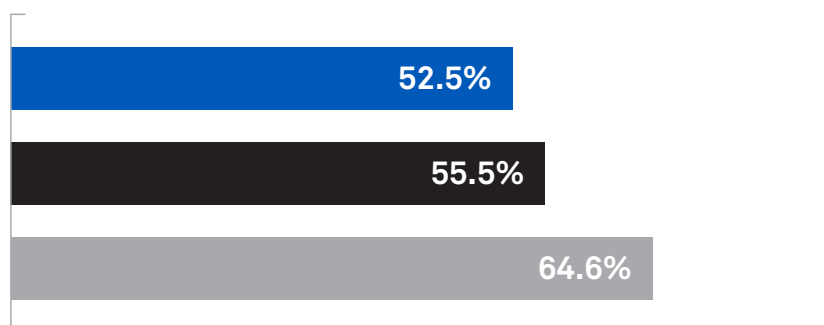

- CAMSO ADT 753R
- CAMSO WHL 753R NEW
- CAMSO WHL 753R 25% WORN

The Camso ADT 753R optimized lug-to-void ratio provides enhanced traction while its premium compounds and E3 depth minimizes heat build-up.

