CAMSO CMP 533





COMPACTION PERFORMANCE AND DURABILITY SOLUTION


Designed to provide heavy-duty compaction performance and durability. Enhances side impact resistance and minimizes both ground pressure and damage when used in paving applications.

PERFORMANCE





CAMSO CMP 533



OPTIMIZED TREAD PATTERN

 Minimizes ground pressure and damage for better compaction performance

ROBUST CARCASS DESIGN

 Enhances side impact resistance for fewer flats




FLATTER TREAD PROFILE

 Ensures even tread wearing for greater durability

ENGINEERED TREAD PROFILE WITH HAULER STEPS AND SHOULDER LUGS

■ Enhances traction for improved performance

| | TIRE SIZE | PR | INFLATION PRESSURE [bar] [PSI] | TT/ TBLS | VALVE | RIM SIZE | | ACTUAL TIRE DIMENSIONS | | | | ر م | | LOAD CAPACITY [kg] [lb] | |
|--|-------------|----|---|-------------|---------|-------------|-----------------|---------------------------|-----------------------------|--------------------------|------|-----------------|-----|----------------------------|------------------|
| | | | | | | Recommended | Alternative | 0.D [mm] [in] | 0.W. [mm] <i>[in]</i> | 0.T.D. [mm] [32nd] | LOAD | SPEED SYMBOL | TRA | 10 km/h 6 mph | 15 km/h 9 mph |
| | 23.1-26 IND | 12 | 1.9 | TBLS | V5-15-1 | DW20B | DW20A; TW20B | 1555 | 611,0 | 26,5 | 162 | A8 | R-3 | 5940 | 5370 |
| | | | 27 | | | | | 388,8 | 24,1 | 34 | | | | 13100 | 11850 |

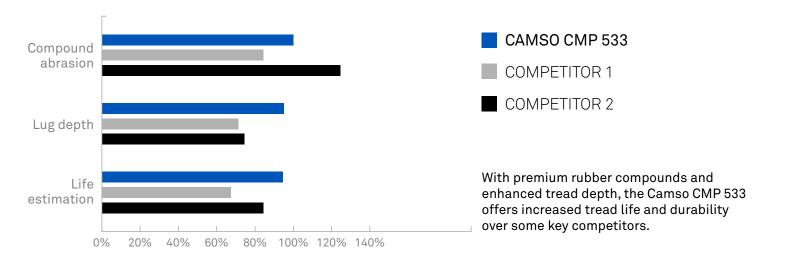

AUTHORIZED DISTRIBUTOR:

camso.co

