


CAMSO CMP 576

FORMERLY SOLIDEAL SM C1



COMPACTORS

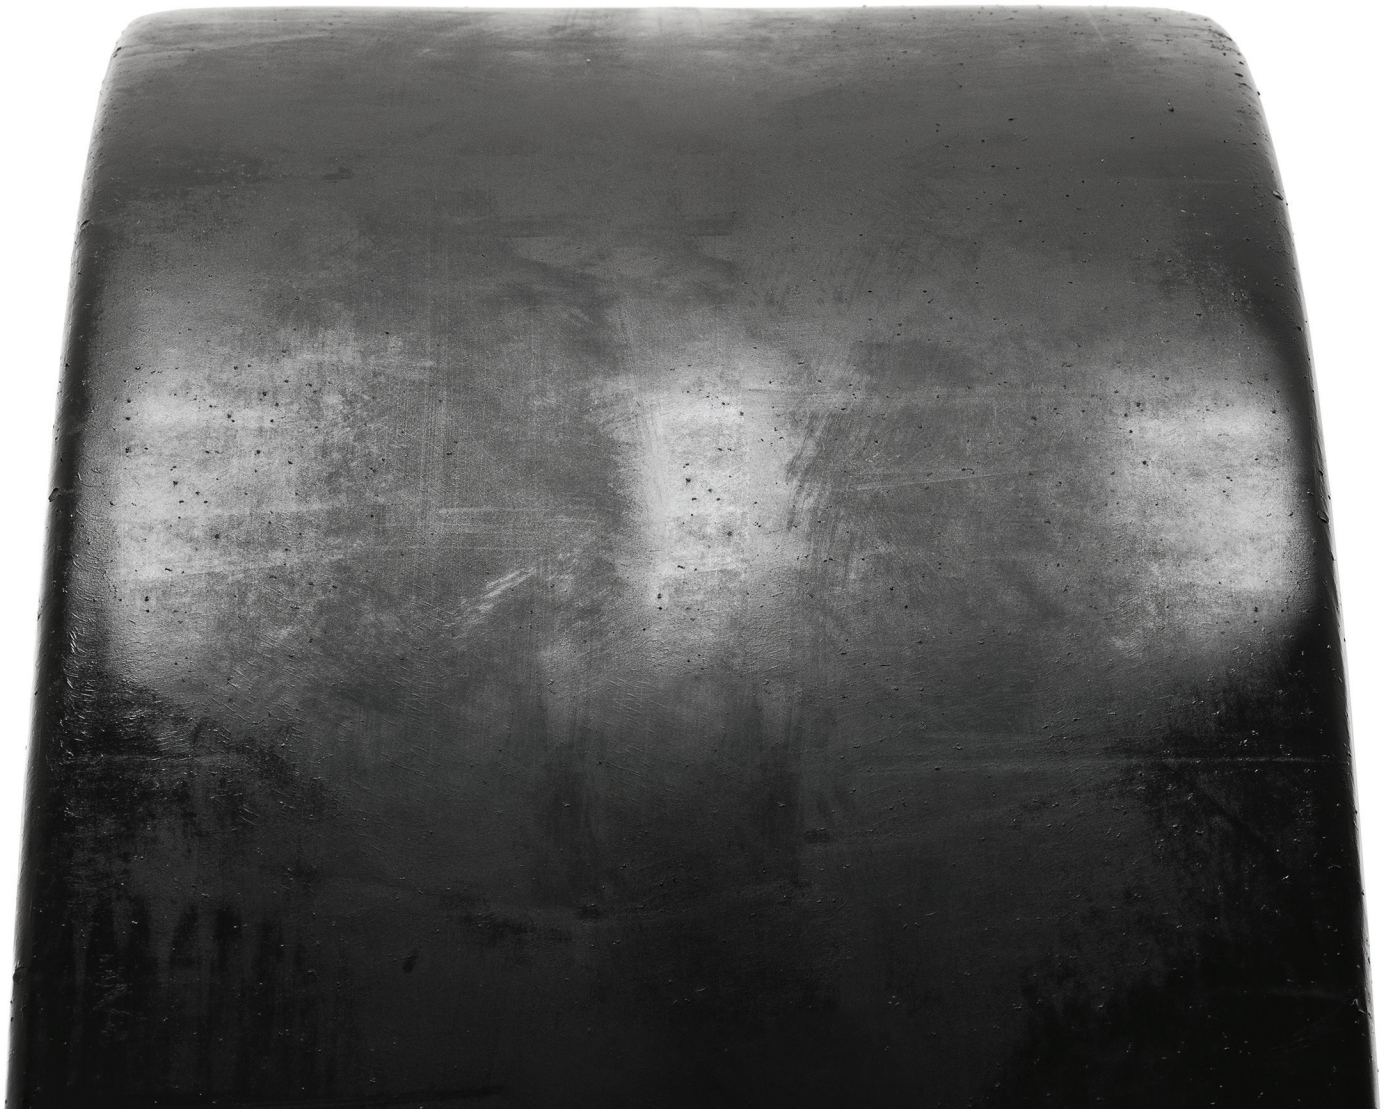

EXCELLENT COMPACTION PERFORMANCE

Provides excellent performance and durability. Wears evenly and reduces ground pressure for maximum compaction.

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



camsso.co



CAMSO CMP 576



SMOOTH, FLAT TREAD PROFILE

- Promotes even wear and reduced ground pressure for better compaction performance



HEAT-RESISTANT RUBBER COMPOUND


- Improves durability for lower cost per hour

ROBUST TREAD SHOULDER


- Provides optimum compaction and minimal grooving

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS		LOAD INDEX	SPEED SYMBOL	TRA CODE	LOAD CAPACITY [kg] [lb]		
			Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]				INFLATION PRESSURE [bar] [PSI]	10 km/h 6 mph	15 km/h 9 mph
7.50-15 NHS	14	TT	6.00	6.50	788	214	136	A3	C-1	8.50	2835	2270
					31.0	8.4				121	6250	5000
8.50/90-15K	6	TBLS	6.00	5.5F	761	217	120	A3	C-1	3.50	1770	1400
					30.0	8.5				50	3900	3100
11.00-20 NHS	16	TT	8.00	8.50	1053	287	167	A2	C-1	7.40	5450	4355
					41.5	11.3				107	12015	9600
11.00-20 NHS	18	TT	8.00	7.50; 8.50	1062	291	169	A2	C-1	8.40	5800	4650
					41.8	11.5				122	12785	10250

7.50-15 PR 14

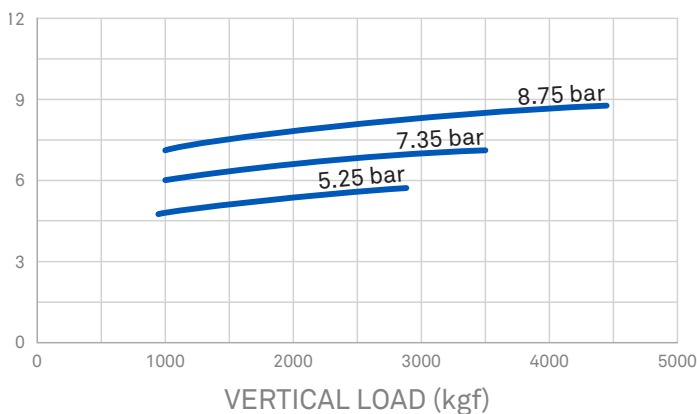

— POSITIVE CONTACT PRESSURE (kg/cm²)



Camso CMP 576 compactor tire features robust tread construction with breakers designed to limit tread crowning. This helps **promote even tread wear** and reduced ground pressure.

