

# CAMSO TLH 732



TELEHANDLERS



MOTOR GRADERS



## ULTIMATE OFF-ROAD TRACTION AND STABILITY

Its wraparound hauler steps and impact guard sidewall design make it the best in off-road traction, durability and puncture resistance.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



# CAMSO TLH 732



### MASSIVE TREAD DEPTH WITH CURVED TREAD LUGS

- Ensures great durability and extra traction

### NEW WRAPAROUND HAULER STEPS

- Maximizes tread cleanout for best off-road traction



### VOID GUARD IMPACT PROTECTION


- Protects from punctures to minimize flat tires

### NEW IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

TIRES SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]							
		RECOMMENDED	ALTERNATIVE	O.D. [mm] [inch]	O.W. [mm] [inch]	O.T.D. [mm] [32nd inch]						STATIC	5 km/h [3 mph]	15 km/h [9 mph]	20 km/h [12.5 mph]	30 km/h [19 mph]	40 km/h [25 mph]	50 km/h [31 mph]	65 km/h [40 mph]
13.00-24 TG	12	10.00VA (SDC)	8.00TG; 9.00/1.5 (DC)	1294	372	23	168	A2	L-2	GRADER	4.50	8950	6400	4875	4700	4300	3925	3525	-
				50.9	14.6	29					65	19730	14110	10750	10360	9480	8655	7770	-
				1294	372	23	146	B	E-2	EARTHMOVER	3.00	-	-	3350	3300	3175	3100	3000	2500
				50.9	14.6	29					44	-	-	7385	7275	7000	6835	6615	5510
				1276	343	23	143	A8	G-2	LOADER - DOZER	3.00	-	-	-	-	-	2725	2475	2000
50.2	13.5	29	44	-	-	-					-	-	6010	5455	4410				
13.00-24 TG	16	10.00	9.0; 9.00/1.5 (DC)	1290	375	24	153	A8	G-2	GRADER	4.00	-	-	-	-	3650	3325	2675	
				50.8	14.8	30					58	-	-	-	-	-	8045	7330	5895
				1290	375	24	152	A8	G-2	EARTHMOVER	4.00	-	-	4000	3925	3800	3675	3575	2975
				50.8	14.8	30					58	-	-	8820	8655	8380	8100	7880	6560
				1290	375	24	173	A2	L-2	LOADER - DOZER	6.00	10400	7400	5650	5450	5000	4550	4100	-
50.8	14.8	30	87	22930	16315	12455					12015	11025	10030	9040	-				
14.00-24 TG	12	8.00TG	10.00VA (SDC); 10.00WA (SDC)	1347	363	25	147	A8	G-2	GRADER	2.75	-	-	-	-	3075	2800	2250	
				53.0	14.3	31					40	-	-	-	-	-	6780	6175	4960
		1364	393	25	150	B	E-2	EARTHMOVER	2.75	-	-	3750	3675	3550	3450	3350	2775		
		53.7	15.5	31					40	-	-	8265	8100	7825	7605	7385	6120		
	1364	393	25	172	A2	L-2	LOADER - DOZER	4.25	10100	7200	5500	5300	4850	4400	3975	-			
	53.7	15.5	31					62	22265	15875	12125	11685	10690	9700	8765	-			
	16	8.00TG	10.00VA (SDC); 9.00/1.5 (DC)	1355	398	26	153	A8	G-2	GRADER	3.75	-	-	-	-	3650	3325	2675	
											53.3	15.7	33	54	-	-	-	-	-
1355		398	26	156	B	E-2	EARTHMOVER	3.75	-	-	4475	4400	4250	4125	4000	3325			
53.3		15.7	33					54	-	-	9865	9700	9370	9095	8820	7330			
1355	398	26	177	A2	L-2	LOADER - DOZER	5.50	11700	8300	6350	6150	5600	5100	4600	-				
53.3	15.7	33					80	25795	18300	14000	13560	12345	11245	10140	-				

## TREAD LIFE COMPARISON

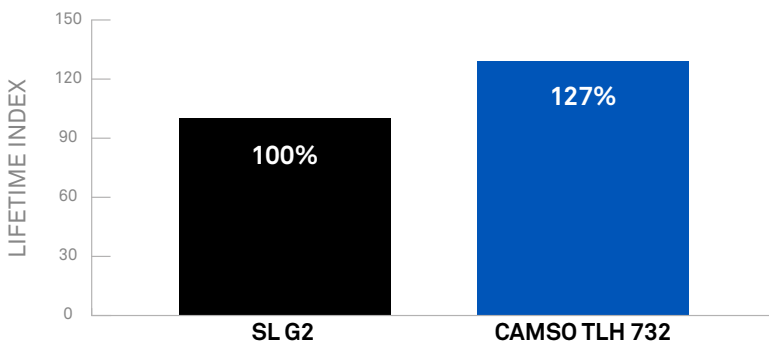

As compared to the SL G2, internal testing showed a 27% improvement on tread life for the Camso TLH 732. In addition, new Void Guard tread protection enhances resistance to punctures for fewer flat tires.

