

CAMSO WEX 552

FORMERLY SOLIDEAL WEX



WHEEL
EXCAVATORS



PERFORMANCE AND QUALITY YOU CAN COUNT ON

Delivers reliable performance for wheel excavators. Enhances stability with added side impact resistance and excellent traction.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WEX 552



ROBUST CARCASS

- Enhances stability and side impact resistance

ADVANCED RUBBER COMPOUNDS

- Improves durability and cut resistance




DEEP LUG DEPTH

- Enhances durability and traction

TIRE SIZE	PR	TT / TBLs	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	MAXIMUM TIRE LOAD [kg] [lb]					
			Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]			All surfaces			Improved surfaces		
										Static	Creep	0-8 km/h 0-5 mph	10 km/h 6 mph	25 km/h 16 mph	45 km/h 28 mph
9.00-20	14	TT	7.00	6.50/7.50	1022	267	19.5	153	A2	6990	5860	4170	3605	2975	2660
					40.2	10.5	25			15450	12950	9200	7950	6550	5850
					1022	267	19.5			8.50 bar	8.50 bar	7.50 bar	7.50 bar	7.00 bar	7.00 bar
					40.2	10.5	25			121 PSI	121 PSI	107 PSI	107 PSI	100 PSI	100 PSI
10.00-20	14	TT	7.50	7.00/8.00	1064	281	21	155	A2	7455	6255	4450	3850	3175	2840
					41.9	11.1	26			16450	13800	9800	8500	7000	6250
					1064	281	21			7.5 bar	7.5 bar	7.0 bar	7.0 bar	6.0bar	6.0bar
					41.9	11.1	26			107 PSI	107 PSI	100 PSI	100 PSI	87 PSI	87 PSI
10.00-20	16	TT	7.50	7.00/8.00	1064	281	21	158	A2	8215	6890	4900	4240	3500	3125
					41.9	11.1	26			18150	15200	10800	9350	7750	6900
					1064	281	21			8.50 bar	8.50 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
					41.9	11.1	26			121 PSI	121 PSI	114 PSI	114 PSI	107 PSI	107 PSI

WEAR RATE (hours/mm)

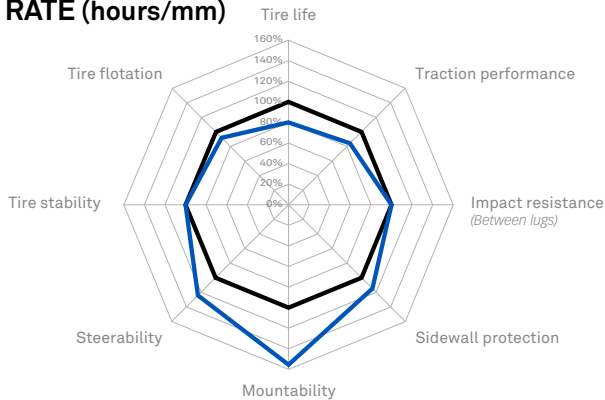

CAMSO WEX 552

PREMIUM
WHEEL EXCAVATOR
TIRE

TREAD ASPECTS



AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY
CAMOPLAST
SOLIDEAL