

CAMSO WHL 753R



WHEEL
LOADERS



MOTOR
GRADERS



ARTICULATED
DUMP TRUCKS



RADIAL PERFORMANCE, VERSATILITY AND DURABILITY

Delivers excellent performance, versatility and durability. With enhanced stability, ride quality and traction, it's the best choice for both one-star and two-star applications.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 753R



HEAVY-DUTY DUAL-STAR CARCASS

- Enhances stability and suitability for both one-star and two-star applications

OFFSET, TAPERED TREAD LUGS

- Reduces vibration for improved ride quality



OPTIMIZED TREAD PATTERN

- Provides excellent durability and low wear rate


NON-DIRECTIONAL STEPPED DESIGN

- Enhances cleanout for improved traction

TIRE SIZE	TYPE	RIM SIZE	TIRE DIMENSIONS			MACHINE	Tread Code	SI	LI	SPEED		INFLATION PRESSURE [bar] [PSI] AND LOAD CAPACITY [kg] [lb]								
			O.D. [mm] [in]	O.W [mm] [in]	O.T.D [mm] [32nd]					km/h	mph	bar	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50
													PSI	43	50	57	64	71	79	86
17.5R25	TBLS	14.00/1.5	1348	469	28	Loader-Dozer	L-3	A2	182	10	5	kg	4850	5600	6000	6500	7100	7500	8000	8500
						Earthmover	E-3	B	167	50	30	lb	10700	12300	13200	14300	15700	16500	17600	18700
			53.1	18.5	35	Grader	G-3	A8	153	40	25	kg	3650	-	-	-	-	-	-	-
20.5R25	TBLS	17.00/2.0	1483	528	31	Loader-Dozer	L-3	A2	193	10	5	kg	-	-	8000	8750	9500	10000	10900	11500
						Earthmover	E-3	B	177	50	30	lb	-	-	17600	19300	20900	22000	24000	25400
			58.4	20.8	39	Grader	G-3	A8	161	40	25	kg	-	-	-	-	-	-	-	-
23.5R25	TBLS	19.50/2.5	1614	623	35	Loader-Dozer	L-3	A2	201	10	5	kg	-	-	-	11200	12150	12850	13600	14500
						Earthmover	E-3	B	185	50	30	lb	-	-	-	24700	26800	28300	30000	32000
			63.5	24.5	44	Grader	G-3	A8	170	40	25	kg	-	-	-	18200	19800	-	-	-
26.5R25	TBLS	22.00/3.0	1746	704	38	Loader-Dozer	L-3	A2	209	10	5	kg	-	-	-	-	15000	16000	17000	18500
						Earthmover	E-3	B	193	50	30	lb	-	-	-	-	33100	35300	37500	40800
			68.7	27.7	48	Grader	G-3	A8	178	40	25	kg	-	-	-	-	24700	-	-	-
29.5R25	TBLS	25.00/3.5	1870	782	40	Loader-Dozer	L-3	A2	216	10	5	kg	-	-	-	-	18000	19500	20600	22400
						Earthmover	E-3	B	200	50	30	lb	-	-	-	-	39700	43000	45400	49400
			73.6	30.8	50	Grader	G-3	A8	187	40	25	kg	-	-	-	-	13600	-	-	-


NEW TIRE

Lug-to-void: 55%

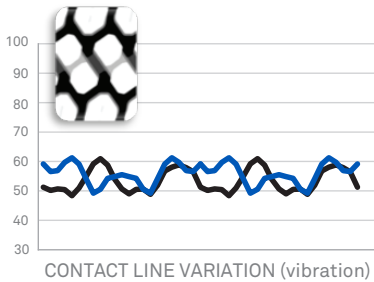

25% WORN TIRE

Lug-to-void: 65%

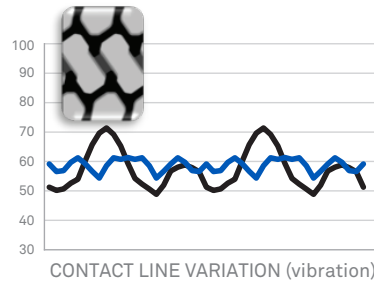

CAMSO WHL 753R

COMPETITOR 1

Patented tread design to minimize vibrations: Poor ride quality caused by high vibration when operating on hard surfaces can affect operator comfort and overall machine performance. The Camso WHL 753R provides **improved ride quality** throughout its tread life.

