

CAMSO WHL 773

FORMERLY SOLIDEAL RM L3



WHEEL
LOADERS



RELIABLE PERFORMANCE IN HARSH APPLICATIONS

Provides reliable performance on any surface. Brings chipping and chunking resistance as well as stability to abrasive and rocky settings.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 773



WIDE FOOTPRINT

- Excellent stability in abrasive and rocky conditions

MONO-BLOCK TREAD PATTERN

- Resists rubber chipping and chunking




HIGH LUG-TO-VOID RATIO

- Provides excellent durability and tread impact resistance

TIRE SIZE	PR	TL/TT	RIM SIZE RECOMMENDED (PERMITTED)	ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRAD CODE	SERVICE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]										
				O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32 nd]						STATIC	5 km/h [3 mph]	15 km/h [9 mph]	30 km/h [19 mph]	40 km/h [25 mph]	50 km/h [31 mph]	65 km/h [40 mph]				
17.5-25	16	TL	14.00/ 1.5 (14.00/1.3 (DC))	1355	460	27	177	A2	L-3	LOADER DOZER	4.75	11700	8300	6350	5600	5100	4600	-				
				53.3	18.1	34					69	25795	18300	14000	12345	11245	10140	-				
				1355	460	27	158	B	E-3	EARTHMOVER	3.00	-	-	4750	4500	4375	4250	3525				
				53.3	18.1	34					44	-	-	10470	9920	9645	9370	7770				
				1355	460	27	150	A8	G-3	GRADER	2.75	-	-	-	-	3350	3050	2450				
				53.3	18.1	34					40	-	-	-	-	7385	6725	5400				
20.5-25	20	TL	17.00/2.0	1489	541	28	186	A2	L-3	LOADER DOZER	4.50	15200	10800	8250	7300	6650	5985	-				
				58.6	21.3	35					65	33510	23810	18190	16095	14660	13195	-				
				1489	541	28	170	B	E-3	EARTHMOVER	3.25	-	-	6720	6360	6180	6000	4975				
				58.6	21.3	35					47	-	-	14815	14020	13625	13230	10970				
				1489	541	28	160	A8	G-3	GRADER	2.75	-	-	-	-	4500	4100	3275				
				58.6	21.3	35					40	-	-	-	-	9920	9040	7220				
23.5-25	20	TL	19.50/2.5	1613	615	33	191	A2	L-3	LOADER DOZER	3.75	17400	12400	9500	8400	7650	6865	-				
				63.5	24.2	42					54	38360	27335	20945	18520	16865	15135	-				
				1613	615	33	177	B	E-3	EARTHMOVER	3.00	-	-	8200	7750	7500	7300	6050				
				63.5	24.2	42					44	-	-	18080	17085	16535	16095	13340				
				23.5-25	24	TL	19.50/2.5	1613	620	33	196	A2	L-3	LOADER DOZER	4.75	20000	14300	10900	9650	8750	7875	-
								63.5	24.4	42					69	44090	31525	24030	21275	19290	17360	-
1613	620	33	180					B	E-3	EARTHMOVER	3.50	-	-	8950	8500	8250	8000	6650				
63.5	24.4	42									51	-	-	19730	18740	18190	17635	14660				
26.5-25	28	TL	22.00/3.0	1745	682	37	203	A2	L-3	LOADER DOZER	4.75	24800	17700	13500	11900	10900	9765	-				
				68.7	26.9	47					69	54675	39020	29760	26235	24030	21530	-				
				1745	682	37	188	B	E-3	EARTHMOVER	3.50	-	-	11200	10600	10300	10000	8300				
				68.7	26.9	47					51	-	-	24690	23370	22710	22045	18300				

CAMSO WHL 773 TYPICAL L2 PATTERN

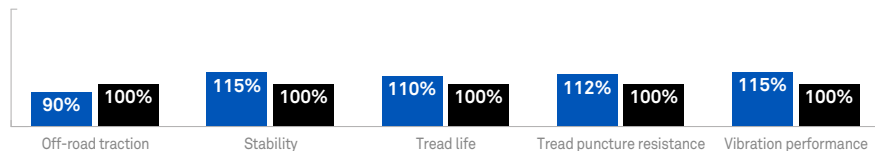

The robust tread design of the Camso WHL 773 provides enhanced stability and tread impact resistance compared to a standard L2 tire. Users can expect **improved performance and durability** in mixed and hard surface applications.

