

CAMSO WHL 775R



WHEEL LOADERS



MULTI-SURFACE DURABILITY AT ITS BEST

Combines multi-surface versatility and long-lasting durability. With excellent stability and resistance to cracking, it's the ideal radial L5 tire solution for extreme mixed- and hard-surface wheel loader applications.

camso.co

PERFORMANCE

TIRE LIFE





PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 775R

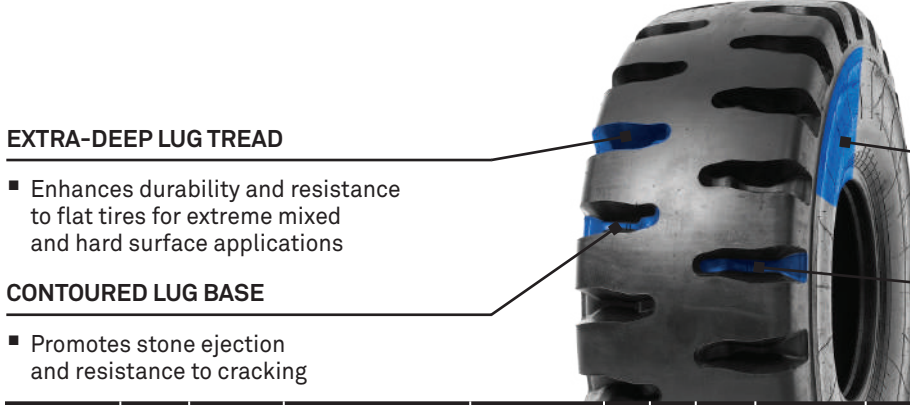

EXTRA-DEEP LUG TREAD

- Enhances durability and resistance to flat tires for extreme mixed and hard surface applications

CONTOURED LUG BASE

- Promotes stone ejection and resistance to cracking

HEAVY-DUTY SIDEWALL CONSTRUCTION

- Protects against side impacts and deformation under heavy load

ROBUST DUAL-STAR CARCASS

- Provides excellent stability and enhanced loading capacity

TIRE SIZE	TYPE	RIM SIZE	TIRE DIMENSIONS			MACHINE	Tread Code	SI	LI	SPEED		INFLATION PRESSURE [bar] [PSI] AND LOAD CAPACITY [kg] [lb]									
			O.D. [mm] [in]	O.W [mm] [in]	O.T.D [mm] [32nd]					km/h	mph	bar	3.00	3.50	4.00	4.50	5.00	5.50	6.00	6.50	
			PSI	43	50							57	64	71	79	86	93				
20.5R25	TBLS	17.00/2.0	1544	517	74	Loader-Dozer	L-5	A2	193	10	5	kg	-	-	8000	8750	9500	10000	10900	11500	
						Earthmover	L-5	B	177	50	30	kg	4750	5300	5800	6500	6900	-	-	-	
			60.8	20.4	93	Grader	L-5	A8	161	40	25	kg	4625	-	-	-	-	-	-	-	-
23.5R25	TBLS	19.50/2.5	1673	605	80	Loader-Dozer	L-5	A2	201	10	5	kg	-	-	-	-	12150	12850	13600	14500	
			65.9	23.8	101							lb	-	-	-	-	26800	28300	30000	32000	
26.5R25	TBLS	22.00/3.0	1791	700	86	Loader-Dozer	L-5	A2	209	10	5	kg	-	-	-	-	-	16000	17000	18500	
			70.5	27.6	108							lb	-	-	-	-	-	35300	37500	40800	
29.5R25	TBLS	25.00/3.5	1915	790	92	Loader-Dozer	L-5	A2	216	10	5	kg	-	-	-	-	-	19500	20600	22400	
			75.4	31.1	116							lb	-	-	-	-	-	43000	45400	49400	



Camsow WHL 775R tread lugs are designed with:

- Step in lugs to protect the carcass from punctures
- Rounded angles to avoid tread tears and better support stress
- Tread Wear Indicator (TWI) to monitor mh/mm performance

