

CAMSO WHL 776R



WHEEL LOADERS



HARD SURFACE DURABILITY AT ITS BEST

Designed to maximize service life on hard-packed surfaces. Resistance to flat tires and side impacts even while carrying heavy loads makes it the L5 radial tire for extreme hard-surface applications.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 776R



EXTRA-DEEP L5 SMOOTH TREAD

- Best durability and resistance to flat tires for extreme hard surface applications

FLAT TREAD PROFILE

- Provides enhanced stability and even wear



HEAVY-DUTY SIDEWALL CONSTRUCTION

- Protects against side impacts and deformation under heavy load


ROBUST DUAL-STAR CARCASS

- Provides excellent stability and enhanced loading capability

TIRE SIZE	TYPE	RIM SIZE	TIRE DIMENSIONS			MACHINE	Tread Code	SI	LI	SPEED		INFLATION PRESSURE [bar] [PSI] AND LOAD CAPACITY [kg] [lb]							
			O.D. [mm] [in]	O.W [mm] [in]	O.T.D [mm] [32nd]					km/h	mph	bar	3.50	4.00	4.50	5.00	5.50	6.00	6.50
												PSI	50	57	64	71	79	86	93
17.5R25	TBLS	14.00/1.5	1402	443	75	Loader-Dozer	L-5	A2	182	10	5	kg	5600	6000	6500	7100	7500	8000	8500
			lb	12300	13200							14300	15700	16500	17600	18700			
23.5R25	TBLS	19.50/2.5	1673	623	80	Loader-Dozer	L-5	A2	201	10	5	kg	-	-	-	12150	12850	13600	14500
			lb	-	-							-	26800	28300	30000	32000			
26.5R25	TBLS	22.00/3.0	1785	709	86	Loader-Dozer	L-5	A2	209	10	5	kg	-	-	-	-	16000	17000	18500
			lb	-	-							-	-	35300	37500	40800			



CONTACT PRESSURE CHART

(Applies to 26.5R25 tire)

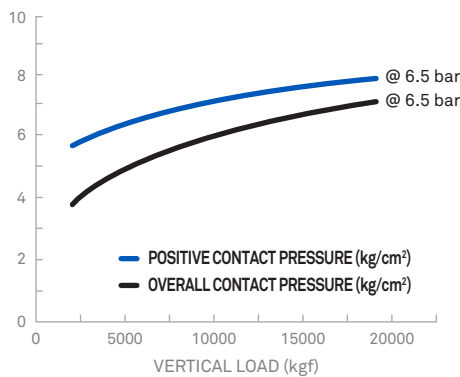

FOOTPRINT DIMENSION CHART

(Applies to 26.5R25 tire)

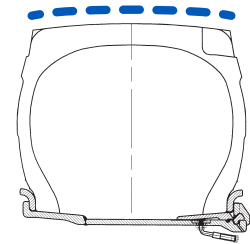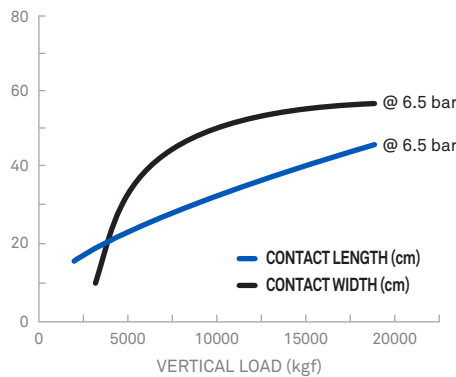

The Camso WHL 776R has a full, flat tread profile for enhanced stability, even wear and low contact pressure.

