

CAMSO WL



WHEEL
EXCAVATORS



HIGH PERFORMANCE, MAXIMUM PROTECTION

Optimizes performance and durability for wheel excavators. Provides the best stability, side impact protection and cut resistance for heavy-duty applications.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WL



HEAVY-DUTY CARCASS

- Provides best stability and side impact resistance

PREMIUM RUBBER COMPOUNDS

- Provides best durability and cut resistance

LARGE CASING DESIGN


- Improves ride quality and stability

EXTRA-DEEP LUG DEPTH

- Provides best durability and traction

TIRE SIZE	PR	TT / TBLs	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	MAXIMUM TIRE LOAD [kg] / [lb]					
			Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]			All surfaces			Improved surfaces		
										Static	Creep	0-8 km/h 0-5 mph	10 km/h 6 mph	25 km/h 16 mph	45 km/h 28 mph
8.25-20	14	TT	6.50	7.00	1000	252	26	148	A2	6105	5120	3645	3150	2600	2325
					39.4	9.9	33			13500	11300	8050	6950	5750	5150
					9.00 bar	9.00 bar	8.00 bar			8.00 bar	7.50 bar	7.50 bar			
					129 PSI	129 PSI	114 PSI			114 PSI	107 PSI	107 PSI			
9.00-20	14	TT	7.00	6.50/7.50	1039	267	27	153	A2	6990	5860	4170	3605	2975	2660
					40.9	10.5	34			15450	12950	9200	7950	6550	5850
					8.50 bar	8.50 bar	7.50 bar			7.50 bar	7.00 bar	7.00 bar			
					121 PSI	121 PSI	107 PSI			107 PSI	100 PSI	100 PSI			
10.00-20	16	TT	7.50	7.00/8.00	1070	284	26	158	A2	8215	6890	4900	4240	3500	3125
					42.1	11.2	33			18150	15200	10800	9350	7750	6900
					8.50 bar	8.50 bar	8.00 bar			8.00 bar	7.50 bar	7.50 bar			
					121 PSI	121 PSI	114 PSI			114 PSI	107 PSI	107 PSI			
11.00-20	16	TT	8.00	8.50	1064	280	22	160	A2	8700	7300	5200	4500	3700	3300
					41.9	11.0	28			19200	16100	11500	9950	8150	7300
					8.50 bar	8.50 bar	7.75 bar			7.75 bar	7.00 bar	7.00 bar			
					121 PSI	121 PSI	111 PSI			111 PSI	100 PSI	100 PSI			

COMPARISON OF 10.00-20 TIRES

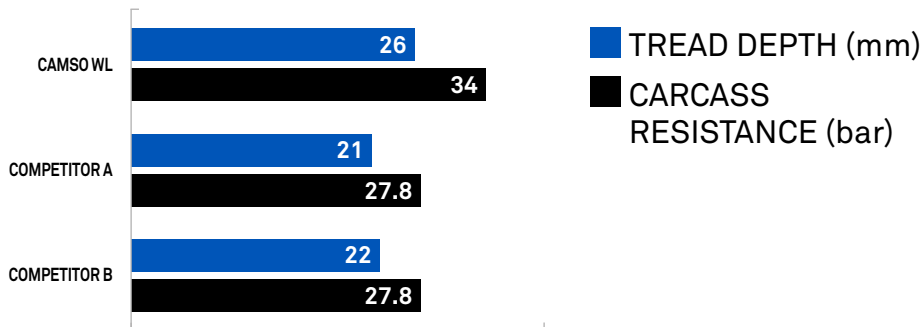

TREAD ASPECTS



AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL