# CAMSO HAULER SKZ





## VERSATILE DURABILITY ON MIXED SURFACES

Provides incredible versatility and durability—the ideal tire solution for mixed-surface operations. With enhanced tread life, even wearing and puncture resistance, it's the perfect choice for a variety of severe applications.

#### **PERFORMANCE**


TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



### CAMSO HAULER SKZ



#### NON-DIRECTIONAL EXTRA DEEP TREAD

 Improves tread life and resistance to punctures

### LARGE FOOTPRINT WITH MASSIVE LUG-TO-VOID RATIO

 Provides excellent durability and even tread wearing



#### **VERSATILE TREAD PATTERN**


 Optimizes traction and handling on mixed and hard surfaces

#### **WIDE SIDEWALL**

■ Provides superior side impact resistance

							Sec. 111.1	Total Control of the					
TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD	SPEED	TRA	INFLATION PRESSURE	MAXIMUM TIRE LOAD [kg] [lb]		
		Recommended	Alternative	0.D. [mm] [in]	0.W. [mm] [in]	0.T.D. [mm] [32nd]	INDEX	SYMBOL	CODE	[bar] [PSI]	Static	8 km/h 5 mph	16 km/h 10 mph
10-16.5	10	8.25	-	786	275	31.0	134	A2	L-4	5.25	3380	2140	1690
				30.9	10.8	39				<i>7</i> 5	7450	4700	3750
12-16.5	12	9.75	-	831	321	35.0	145	A2	L-4	5.60	4550	2880	2280
				32.7	12.6	44				80	10050	6350	5050
14-17.5	14	10.50	-	932	352	45.0	155	A2	l-4	5.60	6120	3875	3060
				36.7	13.9	57				80	13500	8550	6750
31x15.5-15	8	13.00	13LB	777	384	24.0	126	A2	l-4	3.10	2670	1690	1340
				30.6	15.1	30				44	5900	3750	2950
33x15.5-16.5	14	12.00	-	836	380	35.0	148	A2	L-4	4.90	4980	3150	2490
				32.9	15.0	44				70	11000	6950	5500

#### TREAD WEARING PERFORMANCE CHART

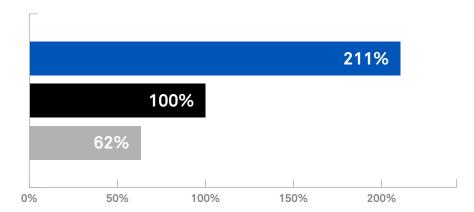

CAMSO HAULER SKZ

PREMIUM R4 TIRE

ENTRY LEVEL R4 TIRE

Camso Hauler SKZ has a massive tread depth and high lug-to-void ratio which provide excellent tread wear performance as shown by an actual comparison against other skid steer tires.

AUTHORIZED DISTRIBUTOR:

camso.co





1601\_CO\_Tire\_ProductSheet\_Hauler SKZ\_A4\_Mixed\_EN\_V4